




STANDARD PRODUCT

Date: 03/02/2009

Prepared for: Production

Planetary Gearmotor

Model Number: MMP TM55-60-24V GP52-195

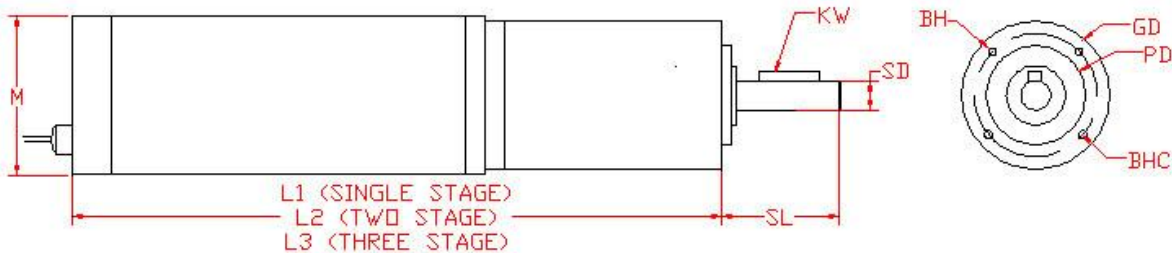

NOTE: TWIN JACKETED LEADWIRES, 11" LONG, EXIT THE REAR END CAP THROUGH A "SEAL TITE" CONNECTOR

Dimensions:

M= 2.17" (55mm)
L (3) =7.8" (197mm)
KW= 4x4x16 mm
SD= 12 mm (+ 0, -18µm)

Note: The Center of the Output Shaft contains an M-4 Threaded Hole, 20mm deep

SL= 25mm (actual working length = 21mm)
GD= 2.047" (52mm)
PD= 32mm, by 3mm long
BHC (dia.) = M5 x 10mm deep (4ea) on a 40mm BCD

DC MOTOR PERFORMANCE PARAMETERS:	Value	Units	Tolerance
RATED VOLTAGE D.C.	24.0	VOLTS	----
RATED CONTINUOUS CURRENT	1.2	AMPERE	----
RATED CONTINUOUS TORQUE	23.0	OZ - IN	----
RATED SPEED	1350	RPM	+/- 15%
RATED CONTINUOUS POWER OUT	23	WATTS	+/- 15%
NO LOAD SPEED	1650	RPM	MAX
NO LOAD CURRENT	0.20	AMPS	MAX
BACK EMF CONSTANT (Ke)	14.4	V/KRPM	+/- 10%
TORQUE CONSTANT (Kt)	19.44	OZ -IN / A	+/- 10%
DC ARMATURE RESISTANCE AT 1.5 AMPS	6.0	OHMS	+/- 15%
ARMATURE TEMP	155	DEGR. C	MAX
PEAK TORQUE (motor-only)	120	OZ - IN	----
PLANETARY GEARMOTOR OUTPUT PARAMETERS:			
PLANETARY GEARHEAD RATIO	195 : 1		
GEARMOTOR RATED CONTINUOUS TORQUE	196	LB-IN.	MAX
GEARMOTOR RATED PEAK TORQUE	443++	LB-IN.	MAX
GEARHEAD SHAFT OUTPUT SPEED (@ F.L.)	7.0	RPM	----
GEARHEAD STANDARD BACKLASH	48	Arc Min.	MAX
GEARHEAD EFFICIENCY	70%		
GEARMOTOR TOTAL WEIGHT	64	OUNCES	MAX

NOTE: TENV DESIGN; MEETS IP-54 STANDARD ~ TRUE PLANETARY GEARING ~ BALL BEARINGS

++ All Peak Torque Values are dependent upon duty. Kindly consult our Sales Offices for further details

MIDWEST MOTION PRODUCTS

Design, Manufacturing & Distribution – Motion Control Equipment

10761 Ahern Avenue S. E. Watertown, MN. 55388

Phone: 952-955-2626 Fax: 480-247-4096

www.midwestmotion.com

email: randy@midwestmotion.com