




REVERSIBLE BRUSHED DC MOTOR

Model Number:

MMP S27-411K-90V

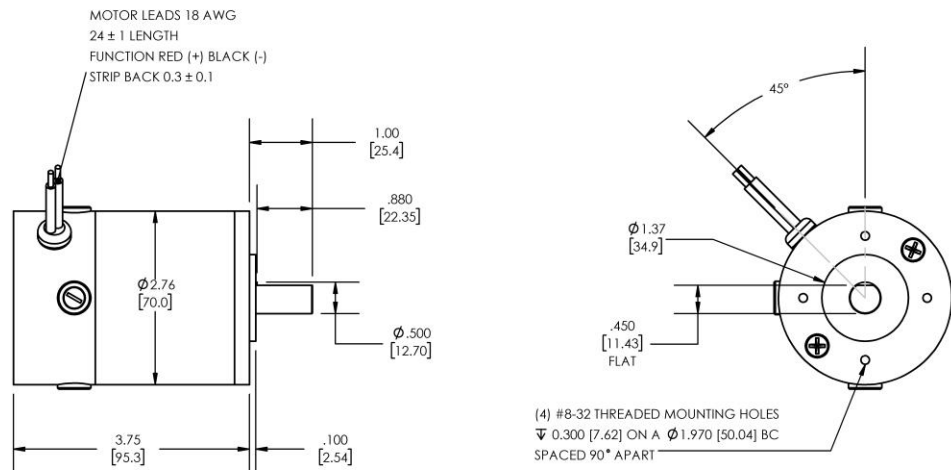

DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

DC MOTOR PERFORMANCE PARAMETERS:	VALUE	UNITS	TOLERANCE
Rated DC Voltage	90	DC VOLTS	----
Rated Continuous Current	4.3	AMPERES	----
No-Load Speed	3659	RPM	MAX
Rated Speed	3060	RPM	+/- 15%
Rated Continuous Power Out	279	WATTS	+/- 15%
Rated Continuous Torque	123	OZ-IN	----
Peak Torque (motor only)	585	OZ-IN	----
No-Load Current	0.60	AMPERES	MAX
Back EMF Constant (Ke)	24.6	V/KRPM	+/- 10%
Torque Constant (Kt)	33.3	OZ-IN/AMP	+/- 10%
DC Armature Resistance	3.41	OHMS	+/- 15%
Armature Inductance	2.20	mH	+/- 15%
Armature temperature	155	DEG. C	MAX

NOTES:

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

MIDWEST MOTION PRODUCTS, INC

DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT

www.midwestmotion.com

email: sales@midwestmotion.com