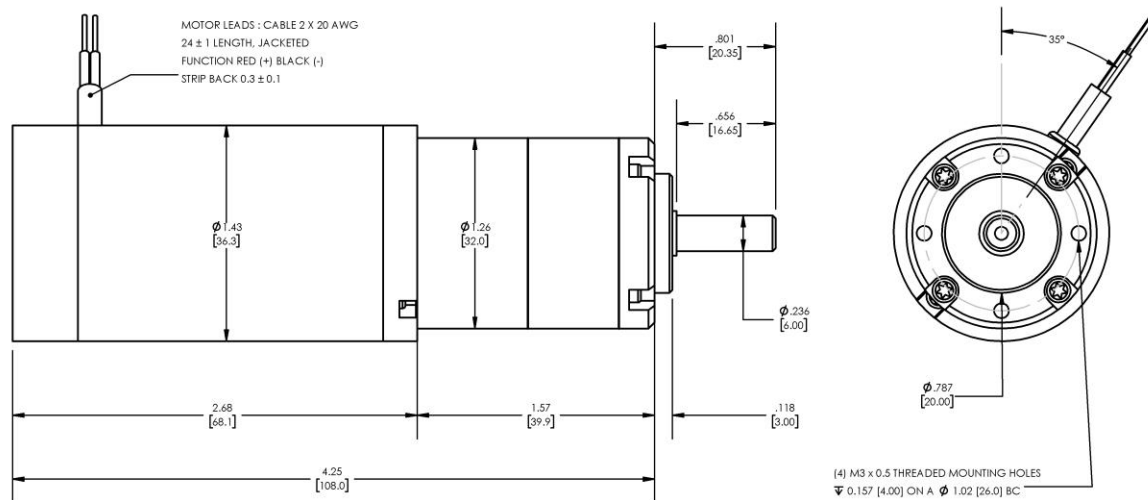


**Model Number:****MMP TM36-268G-48V GP32-03.7**

DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

PLANETARY GEARMOTOR OUTPUT PARAMETERS:	VALUE	UNITS	TOLERANCE
Gearhead Ratio (exact)	3.70 : 1		
Gearhead Shaft Output Speed (at full-load)	1302	RPM	MAX
Gearmotor Rated Continuous Torque	0.6	In-Lbs	MAX
Gearmotor Rated Peak Torque	2.0++	In-Lbs	----
Gearhead Standard Backlash	90	Arc Minutes	MAX
Gearhead Efficiency	80%	----	----
Output Shaft Radial Load Capacity	9	Lbs	MAX
Output Shaft Axial Load Capacity	3	Lbs	MAX
Gearmotor Total Weight	1.0	Lbs	MAX

++ All Peak Torque values are dependent upon duty. Contact our sales office for details.

DC MOTOR PERFORMANCE PARAMETERS:	VALUE	UNITS	TOLERANCE
Rated DC Voltage	48	DC VOLTS	----
Rated Continuous Current	0.40	AMPERES	----
No-Load Speed	6400	RPM	MAX
Rated Speed	4816	RPM	+/- 15%
Rated Continuous Power Out	11	WATTS	+/- 15%
Rated Continuous Torque	3.0	OZ-IN	----
Peak Torque (motor only)	11	OZ-IN	----
No-Load Current	0.10	AMPERES	MAX
Back EMF Constant (Ke)	7.5	V/KRPM	+/- 10%
Torque Constant (Kt)	10.1	OZ-IN/AMP	+/- 10%
DC Armature Resistance	29.67	OHMS	+/- 15%
Armature Inductance	10.28	mH	+/- 15%
Armature temperature	155	DEG. C	MAX

NOTES:

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

MIDWEST MOTION PRODUCTS, INC**DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT**www.midwestmotion.comemail: sales@midwestmotion.com