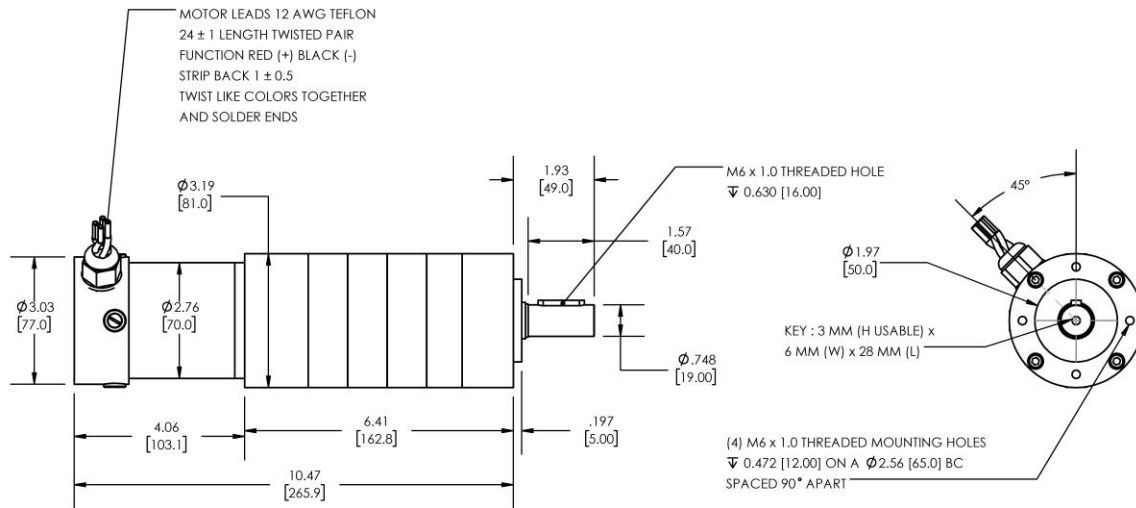


**Model Number:**
**MMP S27-411H-60V GP81-1140**


DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

<b>PLANETARY GEARMOTOR OUTPUT PARAMETERS:</b>	<b>VALUE</b>	<b>UNITS</b>	<b>TOLERANCE</b>
Gearhead Ratio (exact)	1139.73 : 1		
Gearhead Shaft Output Speed (at full-load)	3.8	RPM	MAX
Gearmotor Rated Continuous Torque	2125	In-Lbs	MAX
Gearmotor Rated Peak Torque	<b>2125++</b>	In-Lbs	----
Gearhead Standard Backlash	39	Arc Minutes	MAX
Gearhead Efficiency	65%	----	----
Output Shaft Radial Load Capacity	293	Lbs	MAX
Output Shaft Axial Load Capacity	63	Lbs	MAX
Gearmotor Total Weight	12	Lbs	MAX

**++ All Peak Torque values are dependent upon duty. Contact our sales office for details.**

<b>DC MOTOR PERFORMANCE PARAMETERS:</b>	<b>VALUE</b>	<b>UNITS</b>	<b>TOLERANCE</b>
Rated DC Voltage	60	DC VOLTS	----
Rated Continuous Current	3.73	AMPERES	----
No-Load Speed	4580	RPM	MAX
Rated Speed	4314	RPM	+/- 15%
Rated Continuous Power Out	146	WATTS	+/- 15%
Rated Continuous Torque	46	OZ-IN	----
Peak Torque (motor only)	756	OZ-IN	----
No-Load Current	1.13	AMPERES	MAX
Back EMF Constant (Ke)	13.1	V/KRPM	+/- 10%
Torque Constant (Kt)	17.7	OZ-IN/AMP	+/- 10%
DC Armature Resistance	0.94	OHMS	+/- 15%
Armature Inductance	0.75	mH	+/- 15%
Armature temperature	155	DEG. C	MAX

**NOTES:**

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

**MIDWEST MOTION PRODUCTS**
**DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT**
[www.midwestmotion.com](http://www.midwestmotion.com)

 email: [sales@midwestmotion.com](mailto:sales@midwestmotion.com)