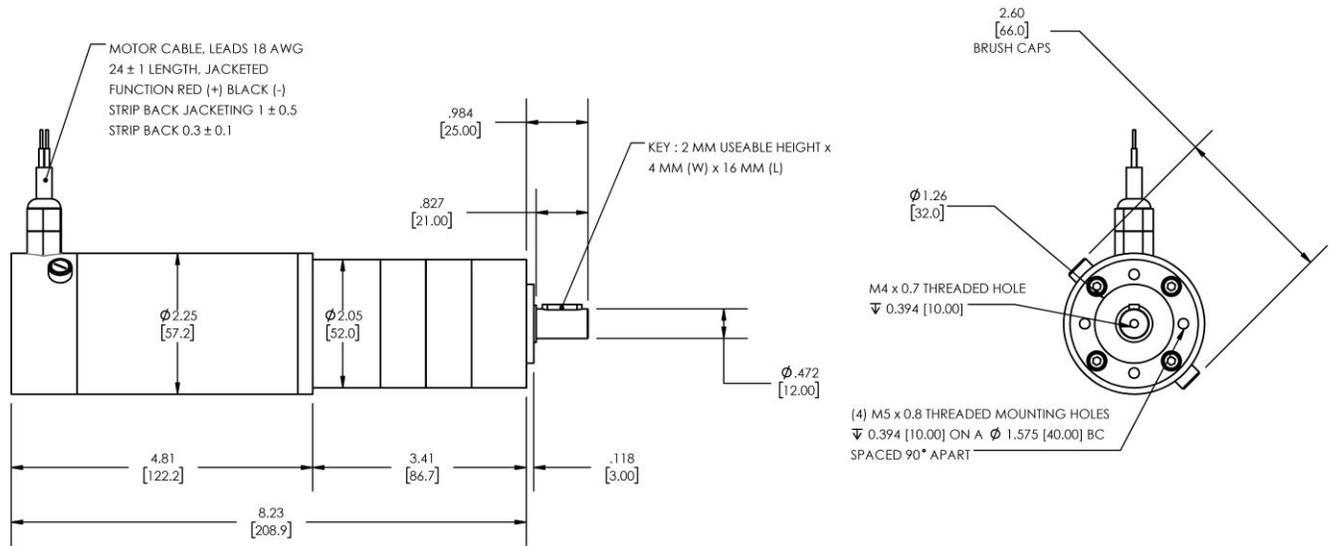


Model Number:
MMP D22-490J-90V GP52-035


DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

| PLANETARY GEARMOTOR OUTPUT PARAMETERS: | VALUE | UNITS | TOLERANCE |
|--|--------------|-------------|-----------|
| Gearhead Ratio (exact) | 34.97 : 1 | | |
| Gearhead Shaft Output Speed (at full-load) | 74 | RPM | MAX |
| Gearmotor Rated Continuous Torque | 80 | In-Lbs | MAX |
| Gearmotor Rated Peak Torque | 203++ | In-Lbs | ---- |
| Gearhead Standard Backlash | 45 | Arc Minutes | MAX |
| Gearhead Efficiency | 75% | ---- | ---- |
| Output Shaft Radial Load Capacity | 72 | Lbs | MAX |
| Output Shaft Axial Load Capacity | 23 | Lbs | MAX |
| Gearmotor Total Weight | 4.6 | Lbs | MAX |

++ All Peak Torque values are dependent upon duty. Contact our sales office for details.

| DC MOTOR PERFORMANCE PARAMETERS: | VALUE | UNITS | TOLERANCE |
|----------------------------------|-------|-----------|-----------|
| Rated DC Voltage | 90 | DC VOLTS | ---- |
| Rated Continuous Current | 1.60 | AMPERES | ---- |
| No-Load Speed | 3614 | RPM | MAX |
| Rated Speed | 2573 | RPM | +/- 15% |
| Rated Continuous Power Out | 94 | WATTS | +/- 15% |
| Rated Continuous Torque | 49 | OZ-IN | ---- |
| Peak Torque (motor only) | 124 | OZ-IN | ---- |
| No-Load Current | 0.13 | AMPERES | MAX |
| Back EMF Constant (Ke) | 24.9 | V/KRPM | +/- 10% |
| Torque Constant (Kt) | 33.6 | OZ-IN/AMP | +/- 10% |
| DC Armature Resistance | 16.26 | OHMS | +/- 15% |
| Armature Inductance | 18.20 | mH | +/- 15% |
| Armature temperature | 155 | DEG. C | MAX |

NOTES:

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

MIDWEST MOTION PRODUCTS
DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT
www.midwestmotion.com

 email: sales@midwestmotion.com