




Model Number:

MMP LA3-12V-40-A-150-P

DC LINEAR ACTUATOR

- IP65 INGRESS PROTECTION
- BUILT-IN LIMIT SWITCHES AT EACH END OF TRAVEL
- ACME SCREW (ANTI-BACKDRIVING)
- NON-ROTATING ALUMINUM INNER TUBE

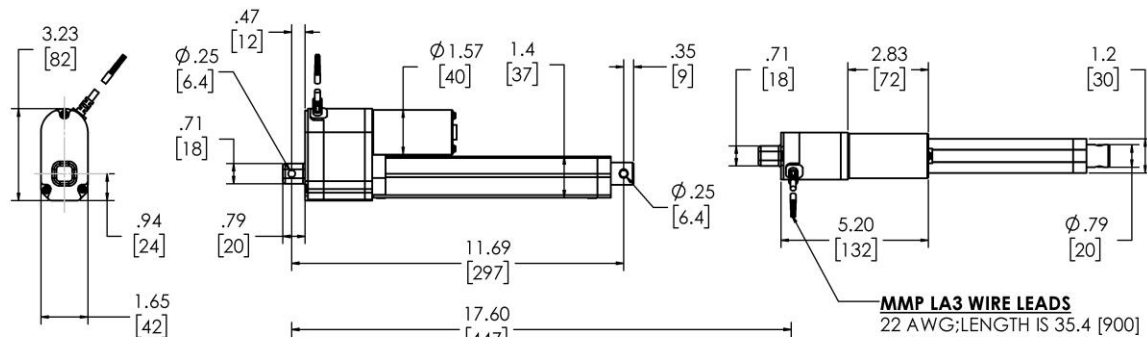

ALL DIMENSIONS
ARE INCHES [MM]
UNLESS OTHERWISE
STATED

MMP LA3 WIRE LEADS

22 AWG; LENGTH IS 35.4 [900]

(2) ACTUATOR POWER
RED (-) AND BLACK (+) WILL
EXTEND ACTUATOR

RED (+) AND BLACK (-) WILL
RETRACT ACTUATOR

(3) POTENTIOMETER



YELLOW (VCC)

BLUE (WIPER)

WHITE (GND)

PERFORMANCE PARAMETERS	VALUE	UNITS	TOLERANCE
Rated DC Voltage	12	VDC	----
Gear Ratio	40:1	----	----
Rated Force Capacity	225 (1000)	LBS (N)	MAX
Rated Current (at rated force capacity)	3.2	AMPERES	MAX
Rated Stroke Speed (at rated force capacity)	0.22 (5.6)	IN/SEC (MM/SEC)	± 10%
Stroke Speed at No-Load	0.28 (7.1)	IN/SEC (MM/SEC)	± 10%
Static Load Capacity	562 (2500)	LBS (N)	MAX
Maximum Recommended Duty	25%	----	MAX
Minimum Ambient Operating Temperature Range	-13 (-25)	°F (C)	MIN
Maximum Ambient Operating Temperature Range	149 (65)	°F (C)	MAX
Actuator Resistance Stroke Range (BLU-WHT)	8.6	kΩ	± 1
Actuator Full Resistance (YLW - WHT)	10	kΩ	± 0.5

PERFORMANCE CURVES:

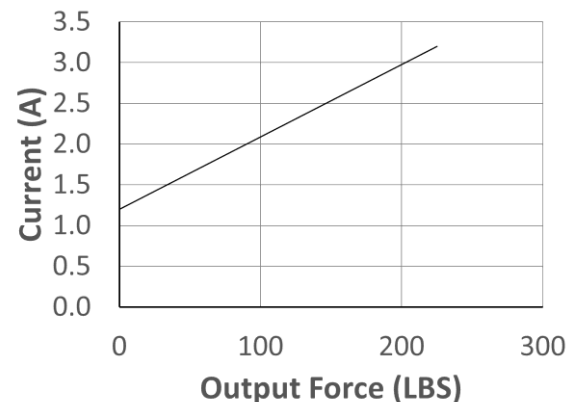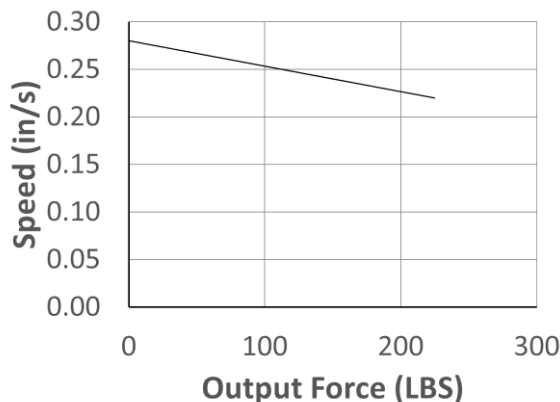

• OPTIONAL MOUNTING BRACKET OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

MIDWEST MOTION PRODUCTS, INC

DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT

www.midwestmotion.com

email: sales@midwestmotion.com