




## DC LINEAR ACTUATOR

- IP65 INGRESS PROTECTION
- BUILT-IN LIMIT SWITCHES AT EACH END OF TRAVEL
- ACME SCREW (ANTI-BACKDRIVING)
- NON-ROTATING ALUMINUM INNER TUBE


Model Number:

# MMP LA3-24V-10-A-300

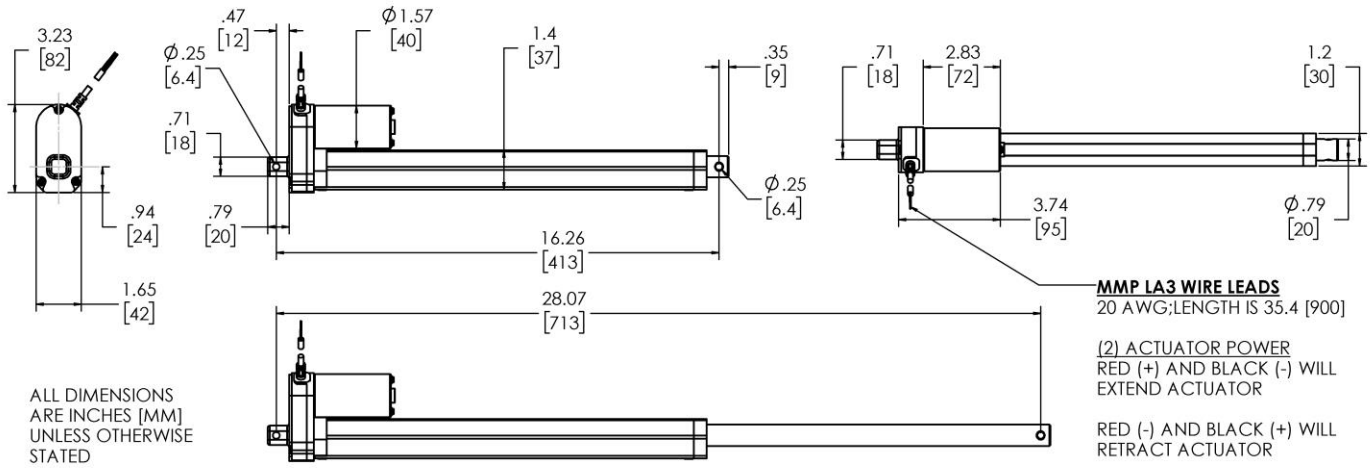

PERFORMANCE PARAMETERS	VALUE	UNITS	TOLERANCE
Rated DC Voltage	24	VDC	----
Gear Ratio	10:1	----	----
Rated Force Capacity	56 (250)	LBS (N)	MAX
Rated Current (at rated force capacity)	1.6	AMPERES	MAX
Rated Stroke Speed (at rated force capacity)	0.93 (23.6)	IN/SEC (MM/SEC)	± 10%
Stroke Speed at No-Load	1.09 (27.7)	IN/SEC (MM/SEC)	± 10%
Static Load Capacity	562 (2500)	LBS (N)	MAX
Maximum Recommended Duty	25%	----	MAX
Minimum Ambient Operating Temperature Range	-13 (-25)	°F (C)	MIN
Maximum Ambient Operating Temperature Range	149 (65)	°F (C)	MAX

## PERFORMANCE CURVES:

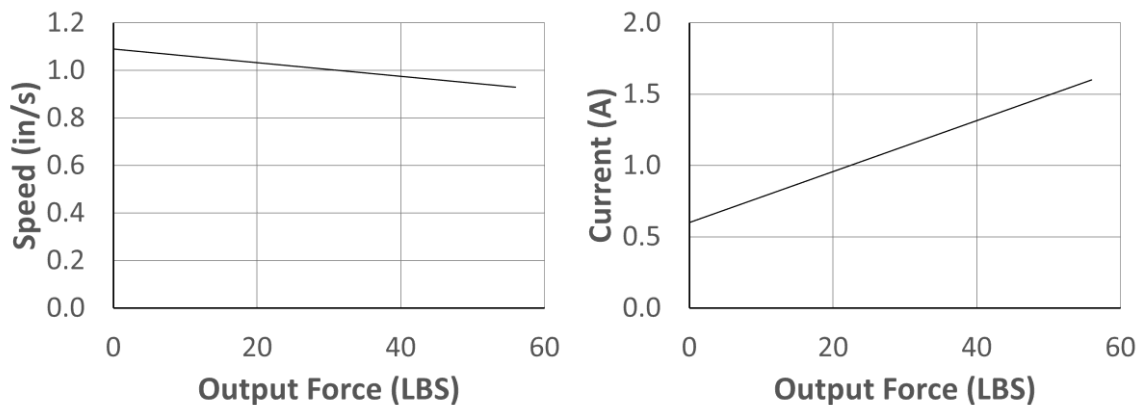

• OPTIONAL MOUNTING BRACKET OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

# MIDWEST MOTION PRODUCTS, INC

DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT

[www.midwestmotion.com](http://www.midwestmotion.com)

email: [sales@midwestmotion.com](mailto:sales@midwestmotion.com)