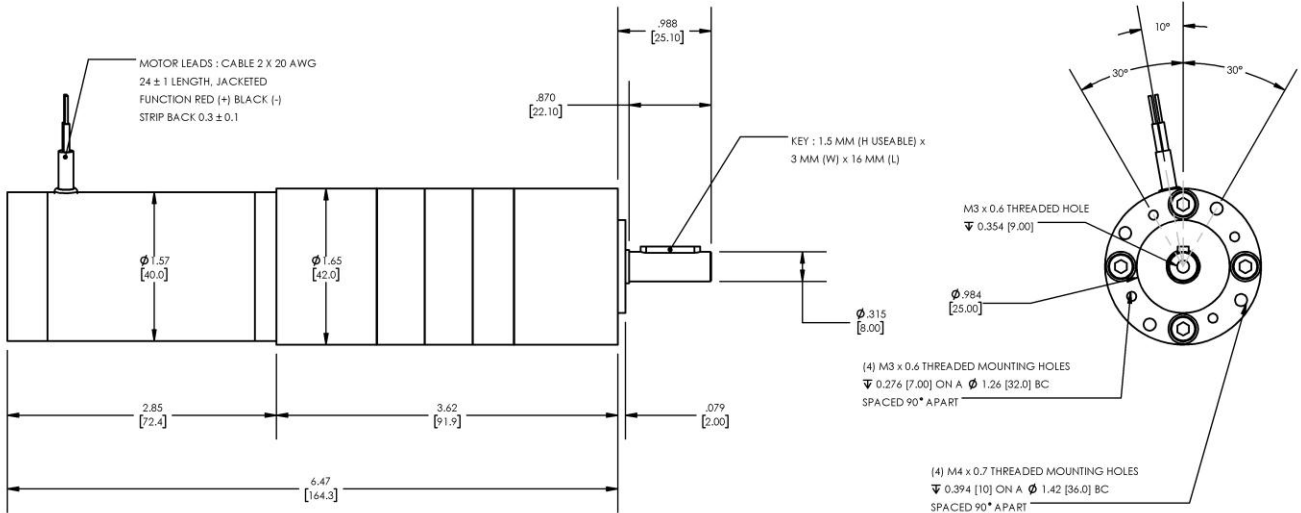


Model Number:
MMP TM40-285B-24V GP42-068


DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

PLANETARY GEARMOTOR OUTPUT PARAMETERS:	VALUE	UNITS	TOLERANCE
Gearhead Ratio (exact)	68.06 : 1		
Gearhead Shaft Output Speed (at full-load)	86	RPM	MAX
Gearmotor Rated Continuous Torque	14	In-Lbs	MAX
Gearmotor Rated Peak Torque	44++	In-Lbs	----
Gearhead Standard Backlash	60	Arc Minutes	MAX
Gearhead Efficiency	70%	----	----
Output Shaft Radial Load Capacity	68	Lbs	MAX
Output Shaft Axial Load Capacity	25	Lbs	MAX
Gearmotor Total Weight	1.9	Lbs	MAX

++ All Peak Torque values are dependent upon duty. Contact our sales office for details.

DC MOTOR PERFORMANCE PARAMETERS:	VALUE	UNITS	TOLERANCE
Rated DC Voltage	24	DC VOLTS	----
Rated Continuous Current	1.45	AMPERES	----
No-Load Speed	8000	RPM	MAX
Rated Speed	5884	RPM	+/- 15%
Rated Continuous Power Out	20	WATTS	+/- 15%
Rated Continuous Torque	4.7	OZ-IN	----
Peak Torque (motor only)	15	OZ-IN	----
No-Load Current	0.30	AMPERES	MAX
Back EMF Constant (Ke)	3.0	V/KRPM	+/- 10%
Torque Constant (Kt)	4.1	OZ-IN/AMP	+/- 10%
DC Armature Resistance	4.39	OHMS	+/- 15%
Armature Inductance	1.45	mH	+/- 15%
Armature temperature	155	DEG. C	MAX

NOTES:

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

MIDWEST MOTION PRODUCTS
DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT
www.midwestmotion.com

 email: sales@midwestmotion.com