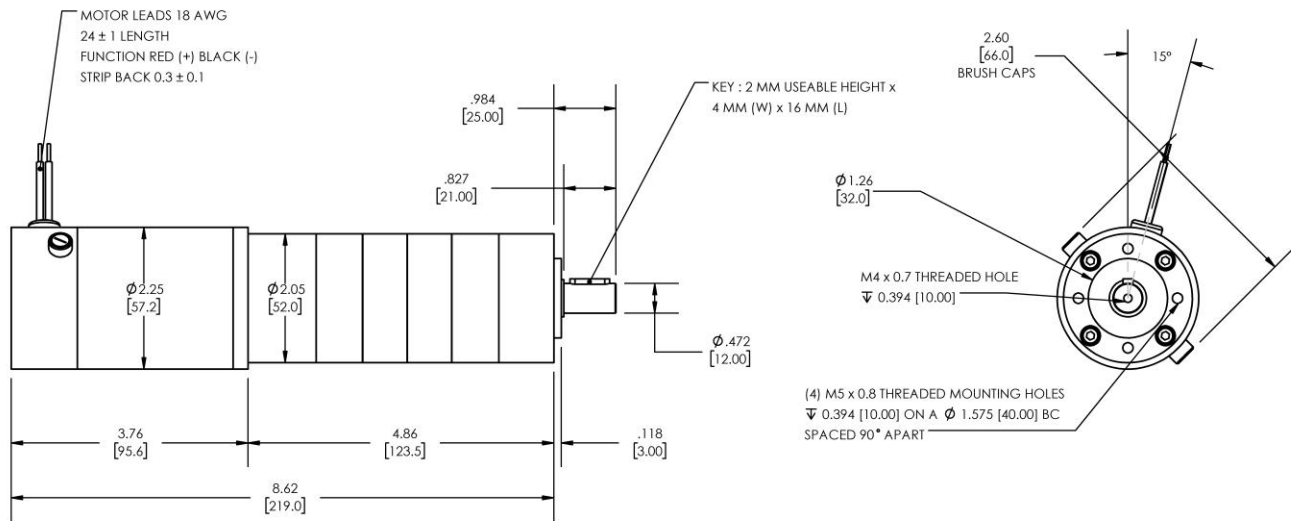


Model Number:
MMP D22-376F-36V GP52-2076


DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

| PLANETARY GEARMOTOR OUTPUT PARAMETERS: | VALUE | UNITS | TOLERANCE |
|--|-------------|-------------|-----------|
| Gearhead Ratio (exact) | 2075.94 : 1 | | |
| Gearhead Shaft Output Speed (at full-load) | 2.3 | RPM | MAX |
| Gearmotor Rated Continuous Torque | 443 | In-Lbs | MAX |
| Gearmotor Rated Peak Torque | 443++ | In-Lbs | ---- |
| Gearhead Standard Backlash | 51 | Arc Minutes | MAX |
| Gearhead Efficiency | 65% | ---- | ---- |
| Output Shaft Radial Load Capacity | 113 | Lbs | MAX |
| Output Shaft Axial Load Capacity | 45 | Lbs | MAX |
| Gearmotor Total Weight | 4.7 | Lbs | MAX |

++ All Peak Torque values are dependent upon duty. Contact our sales office for details.

| DC MOTOR PERFORMANCE PARAMETERS: | VALUE | UNITS | TOLERANCE |
|----------------------------------|-------|-----------|-----------|
| Rated DC Voltage | 36 | DC VOLTS | ---- |
| Rated Continuous Current | 0.99 | AMPERES | ---- |
| No-Load Speed | 5143 | RPM | MAX |
| Rated Speed | 4811 | RPM | +/- 15% |
| Rated Continuous Power Out | 19 | WATTS | +/- 15% |
| Rated Continuous Torque | 5.3 | OZ-IN | ---- |
| Peak Torque (motor only) | 97 | OZ-IN | ---- |
| No-Load Current | 0.43 | AMPERES | MAX |
| Back EMF Constant (Ke) | 7.0 | V/KRPM | +/- 10% |
| Torque Constant (Kt) | 9.5 | OZ-IN/AMP | +/- 10% |
| DC Armature Resistance | 2.35 | OHMS | +/- 15% |
| Armature Inductance | 2.25 | mH | +/- 15% |
| Armature temperature | 155 | DEG. C | MAX |

NOTES:

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

MIDWEST MOTION PRODUCTS
DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT
www.midwestmotion.com

 email: sales@midwestmotion.com