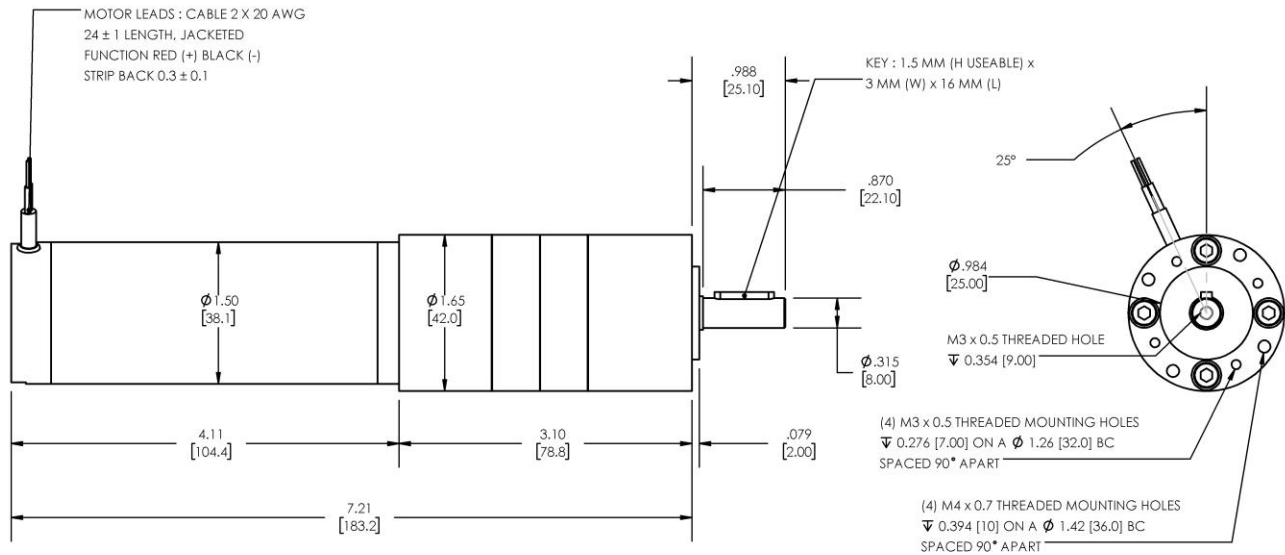


**Model Number:****MMP S17-400G-48V GP42-016**

DIMENSIONS ARE INCHES [MM] UNLESS OTHERWISE STATED

PLANETARY GEARMOTOR OUTPUT PARAMETERS:	VALUE	UNITS	TOLERANCE
Gearhead Ratio (exact)	15.88 : 1		
Gearhead Shaft Output Speed (at full-load)	244	RPM	MAX
Gearmotor Rated Continuous Torque	17	In-Lbs	MAX
Gearmotor Rated Peak Torque	45++	In-Lbs	----
Gearhead Standard Backlash	57	Arc Minutes	MAX
Gearhead Efficiency	75%	----	----
Output Shaft Radial Load Capacity	52	Lbs	MAX
Output Shaft Axial Load Capacity	18	Lbs	MAX
Gearmotor Total Weight	2.3	Lbs	MAX

++ All Peak Torque values are dependent upon duty. Contact our sales office for details.

DC MOTOR PERFORMANCE PARAMETERS:	VALUE	UNITS	TOLERANCE
Rated DC Voltage	48	DC VOLTS	----
Rated Continuous Current	2.1	AMPERES	----
No-Load Speed	5351	RPM	MAX
Rated Speed	3870	RPM	+/- 15%
Rated Continuous Power Out	65	WATTS	+/- 15%
Rated Continuous Torque	23	OZ-IN	----
Peak Torque (motor only)	61	OZ-IN	----
No-Load Current	0.21	AMPERES	MAX
Back EMF Constant (Ke)	9.0	V/KRPM	+/- 10%
Torque Constant (Kt)	12.1	OZ-IN/AMP	+/- 10%
DC Armature Resistance	6.40	OHMS	+/- 15%
Armature Inductance	1.10	mH	+/- 15%
Armature temperature	155	DEG. C	MAX

NOTES:

- ENCODER & BRAKE OPTIONS AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)
- NEMA MOUNTING FLANGE OPTION AVAILABLE – [FOLLOW THIS LINK FOR DETAILS](#)

MIDWEST MOTION PRODUCTS, INC**DESIGN, MANUFACTURING & DISTRIBUTION - MOTION CONTROL EQUIPMENT**www.midwestmotion.comemail: sales@midwestmotion.com